

BIRCH, STEWART, KOLASCH & BIRCH, LLP

TERRELL C BIRCH
RAYMOND C STEWART
JOSEPH A KOLASCH
JAMES M SLATTERY
BERNARD L SWEENEY*
MICHAEL K. MUTTER
CHARLES GORENSTEIN
GERALD M MURPHY, JR
LEONARD R SVENSSON
TERRY L CLARK
ANDREW D. MEIKLE
MARC S WEINER
JOE MCKINNEY MUNCY
ROBERT J KENNEY
DONALD J DALEY
JOHN W BAILEY
JOHN A CASTELLANO
GARY D YACURA

OF COUNSEL
HERBERT M BIRCH (1905-1996)
ELLIOT A GOLDBERG*
WILLIAM L GATES*
EDWARD H. VALANCE
RUPERT J BRADY (RET)*
F. PRINCE BUTLER
FRED S WHISENHUNT

*ADMITTED TO A BAR OTHER THAN VA

INTELLECTUAL PROPERTY LAW

8110 GATEHOUSE ROAD
SUITE 500 EAST
FALLS CHURCH, VA 22042-1210
USA

(703) 205-8000

FAX: (703) 205-8050
(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com
web: http://www.bskb.com

CALIFORNIA OFFICE
COSTA MESA, CALIFORNIA

THOMAS S. AUCHTERLONE
JAMES T ELLER, JR.
SCOTT L. LOWE
MARK J. NUEL, PH.D.
D. RICHARD ANDERSON
PAUL C. LEWIS
MARK W. MILSTEAD*
RICHARD J. GALLAGHER
JAYNE M. SAYDAH*
MARYANNE ARMSTRONG, PH.D.
HYUNG N. SOHN
ALAN PEDERSEN-GILES
KECIA J. REYNOLDS

REG. PATENT AGENTS
FREDERICK R. HANDREN
MAKI HATSUMI
MIKE S. RYU
CRAIG A. McROBBIE
GARTH M. DAHLEN, PH.D.
ROBERT E. GOOZNER, PH.D.
MATTHEW J. LATTIG
TIMOTHY R. WYCKOFF
KRISTI L. RUPERT, PH.D.
LARRY J. HUME
ALBERT K. LEE
HRAYR A. SAYADIAN, PH.D.
EVE L. FRANK, PH.D.
MATTHEW T. SHANLEY

jc891 U.S. PRO
11/28/00

jc891 U.S. PRO
09/22/92
11/28/00

Date: November 28, 2000
Docket No.: 2611-0136P

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

As authorized by the inventor(s), transmitted herewith for filing
is a patent application applied for on behalf of the inventor(s)
according to the provisions of 37 CFR 1.41(c).

Inventor(s): KAJIYA, Satoshi
SHIMIZU, Katsuhiko; KOBAYASHI, Yukio
MIZUOCHI, Takashi

For: OPTICAL WAVELENGTH DIVISION MULTIPLEXING TRANSMISSION
SYSTEM

Enclosed are:

- ☒ A specification consisting of 19 pages
- ☒ 17 sheet(s) of formal drawings
- ☐ Applicant does not claim priority
- ☐ Applicant claims the right of priority under 3 USC 119 based on
Application No(s): _____ filed in _____ on _____.
☐ Certified copy is attached hereto
☐ Certified copy will follow
- ☒ Executed Declaration in accordance with 37 CFR 1.64 will follow
- ☐ A verified statement to establish small entity status under 37
CFR 1.9 and 37 CFR 1.27

- ☐ Applicant claims small entity status under 37 CFR 1.27
☐ Preliminary Amendment
☒ Information Disclosure Statement, PTO-1449 with reference(s)
☐ Application Data Sheet in accordance with 37 CFR 1.76
☐ Other _____
☐ Applicant requests early publication

The filing fee has been calculated as shown below:

LARGE ENTITY

SMALL ENTITY

FOR	NO. FILED	NO. EXTRA	RATE	FEE		RATE	FEE
BASIC FEE	***** ***** *****	***** ***** *****	***** ***** *****	\$710.00	or	***** ***** *****	\$355.00
TOTAL CLAIMS	10 - 20 =	0	x18 = \$	0.00	or	x 9 = \$	0.00
INDEPENDENT	1 - 3 =	0	x80 = \$	0.00	or	x 40 = \$	0.00
MULTIPLE DEPENDENT CLAIM PRESENTED	<u>no</u>		+270 = \$	0.00	or	+135 = \$	0.00

TOTAL \$ 710.00

TOTAL \$ 0.00

- ☒ The application transmitted herewith is filed in accordance with 37 CFR 1.41(c). The undersigned has been authorized by the inventor(s) to file the present application. The original duly executed patent application together with the surcharge will be forwarded in due course.
☒ A check in the amount of \$ 710.00 to cover the filing fee and recording fee (if applicable) is enclosed.
☐ The Government Filing Fee will be paid at the time of completion of the filing requirement.
☐ Please charge Deposit Account No. 02-2448 in the amount of \$ _____. A triplicate copy of this transmittal form is enclosed.

X Send Correspondence to: BIRCH, STEWART, KOLASCH & BIRCH, LLP
P. O. Box 747
Falls Church, Virginia 22040-0747


— No fee is enclosed.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. 1.16 or under 37 C.F.R. 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By

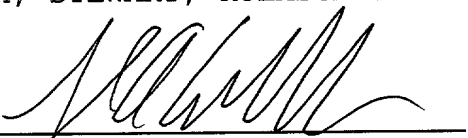
JOHN CASTELLANO

Reg. No. 35,094

P. O. Box 747

Falls Church, Virginia 22040-0747

(703) 205-8000

JAC/rem

OPTICAL WAVELENGTH DIVISION MULTIPLEXING TRANSMISSION SYSTEM

FIELD OF THE INVENTION

5 The present invention in general relates to an optical transmission system. More particularly, this invention relates to an optical wavelength division multiplexing transmission system.

10 BACKGROUND OF THE INVENTION

 In recent years, with still more expanding expectations for development of an optical communication technique to provide a high bit rate, large capacity transmission path as an infrastructure of the information-oriented society,
15 there have been promoted global and vigorous researches and developments of high rate, large capacity optical communication systems.

 On the land, an optical wavelength division multiplexing transmission system of a 10 Gb/s transmission
20 rate using a transmission path of a 1.3 μm band single mode fiber (SMF) and a 1.55 μm band dispersion shift fiber (DFS) has come in practice.

 Under the ocean, on the other hand, an optical wavelength division multiplexing transmission system of a 10 Gb/s
25 transmission rate using a transmission path of a non-zero

dispersion shift fiber having a zero-dispersion wavelength at a 1.58 μm band has come in practice.

Generally, there occurs a transmission waveform deterioration in the optical fiber due to interaction (called SPM-GVD effect) between a self-phase modulation (SPM) and a group-velocity dispersion (GVD). Therefore, a possibly smaller value should be set as a value of the (group-velocity) dispersion to be caused by a difference in transmission time in optical fiber between optical signals different of wavelength.

However, as the wavelengths of the optical signals approach a zero-dispersion wavelength, there is an increased tendency for a four-wave mixing (FWM) to cause a crosstalk, with an increased deterioration of transmission characteristic. Therefore, the optical wavelength division multiplexing transmission requires a wavelength layout in consideration of a zero-dispersion wavelength of optical fiber.

An optical wavelength division multiplexing transmission system is disclosed in Japanese Patent Application Laid-Open Publication No. 8-97771. This conventional system uses a transmission path of a 1.55 μm band dispersion shift fiber (DSF), in which the effect of a conventional four-optical-wave mixing is suppressed.

Fig. 17 is a graph describing the principle of the

conventional system, in which signals of respective wavelengths are subject to a wavelength conversion for an interchange between wavelengths to make the optical level of crosstalk lower than specified.

5 At present, if two different networks (transmission paths), such as for land use and submarine use, are to be connected at a connection point therebetween, then the two different networks are electrically terminated. However, it is necessary for aiming at a practical low-cost system
10 to implement a connection-less simplified structure for structural integration of two networks.

 In the conventional system, however, optical fibers in use have different zero-dispersion wavelengths, and a direct use for transmission accompanies a crosstalk due to
15 the SPM-GVD effect or FWM, as a significant problem.

SUMMARY OF THE INVENTION

 The optical wavelength division multiplexing transmission system according to the present invention
20 comprises a first optical fiber transmission path for a wavelength division multiplex signal to be input therefrom, a second optical fiber transmission path having a zero-dispersion wavelength different from the first optical fiber transmission path, and an optical repeater in which
25 the wavelength division multiplex signal input from the first

optical fiber transmission path is wavelength-converted with respect to respective wavelengths thereof, for an output thereof to the second optical fiber transmission path.

Other objects and features of this invention will become
5 apparent from the following description with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of an arrangement according
10 to a first embodiment of the invention;

Fig. 2A is a graph of wavelength layout at an input side of the first embodiment and Fig. 2B is a graph of wavelength layout at an output side of the first embodiment;

Fig. 3 is a block diagram of an optical repeater 1
15 according to the first embodiment;

Fig. 4 is a block diagram of an optical repeater 11 according to a second embodiment of the invention;

Fig. 5 is a block diagram of an optical repeater 21 according to a third embodiment of the invention;

20 Fig. 6 is a block diagram of an optical repeater 31 according to a fourth embodiment of the invention;

Fig. 7 is a block diagram of another optical repeater 61 according to the fourth embodiment;

Fig. 8 is a block diagram of a wavelength converter
25 62 according to a fifth embodiment of the invention;

Fig. 9 is a block diagram of a wavelength converter 63 according to a sixth embodiment of the invention;

Fig. 10 is a block diagram of a wavelength converting element 111 according to a seventh embodiment of the invention;

Fig. 11 is a block diagram of a wavelength converting element 112 according to an eighth embodiment of the invention;

Fig. 12 is a block diagram of a wavelength converting element 113 according to a ninth embodiment of the invention;

Fig. 13A and Fig. 13B are graphs of wavelength layout at an input and output side according to a tenth embodiment of the invention;

Fig. 14A and Fig. 14B are graphs of wavelength layout at an input and output side according to an eleventh embodiment of the invention;

Fig. 15A and Fig. 15B are graphs of wavelength layout at an input and output side according to a twelfth embodiment of the invention;

Fig. 16A and Fig. 16B are graphs of wavelength layout at an input and output side according to a thirteenth embodiment of the invention;

Fig. 17 is a graph of wavelength layout of a conventional example.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention are explained below with reference to the accompanying drawings.

Fig. 1 shows a network arrangement according to a first embodiment of the invention. Legend 1 denotes an optical repeater having a wavelength converter, legend 2 denotes an optical fiber having a zero-dispersion wavelength λ_0 , and legend 3 denotes an optical fiber having a zero-dispersion wavelength λ_0' .

Fig. 2A and Fig. 2B show examples of wavelength layout according to this embodiment. Fig. 2A is a graph of wavelength layout of an optical input signal in the optical repeater 1. Relative to the zero-dispersion wavelength λ_0 of the optical fiber 2, n waves λ_1 to λ_n are laid out so that the SPM-GVD effect and FWM of their wavelengths are minimized.

Fig. 2B is a graph of wavelength layout of an optical output signal in the optical repeater 1. At the optical fiber 3, this signal is wavelength-converted so as to minimize the SPM-GVD effect and FWM relative to the zero-dispersion wavelength λ_0' , and is output.

Fig. 3 shows an arrangement of an optical repeater 1 according to the first embodiment. Legend 5 denotes a wavelength selector, legend 6 denotes a wavelength converter, and legend 7 denotes a wave combiner. The wavelength selector 5 and the wave combiner 7 can be constituted with ease by

an optical filter and a photo-coupler, respectively.

The optical repeater 1 operates as explained next. An optical signal with multiplexed wavelengths λ_1 to λ_n is input into the wavelength selector 5. The wavelength selector 5 separates the received multiplexed wavelengths λ_1 to λ_n into optical signals by the wavelengths λ_1 to λ_n and supplies the separated wavelength to the wavelength converters 6.

Based on a control signal, the wavelength converters 6 respectively convert the wavelengths, such that λ_1 into λ_1' and λ_2 into λ_2' etc.. The wavelength converters 6 provide the converted wavelengths to the wave combiner 7. The wave combiner combines the wavelengths λ_1' , λ_2' , ..., λ_n' and outputs the result.

Thus, there can be implemented a connection-less simplified structure for structural integration of the two networks (transmission paths).

As explained above, an optical repeater 1 is provided between a first optical fiber transmission path 2 and a second optical fiber transmission path 3 having a zero-dispersion wavelength different from the first optical fiber transmission path 2. This optical repeater 1 wavelength-converts with respect to respective wavelengths a wavelength division multiplex signal input from the first optical fiber transmission path 2, and output the result to

the second optical fiber transmission path 3. Therefore,
the SPM-GVD effect and FWM in the second optical fiber
transmission path are minimized, thereby implementing a
connection-less simplified structure for structural
5 integration of the two networks (transmission paths).

Fig. 4 shows an optical repeater 11 according to a second
embodiment. In this optical repeater 11, a wave divider 4
and wavelength selectors 5 are provided in place of the
wavelength selector 5 in the first embodiment shown in Fig.
10 3. The wave divider 4 may be, for example, a photo-coupler.

An optical signal with multiplexed wavelengths λ_1 ,
 $\lambda_2, \dots, \lambda_n$ is input to the wave divider 4, wherefrom optical
signals of all channels are likewise output to be sent to
the wavelength selectors 5, where they have their wavelengths
15 $\lambda_1, \lambda_2, \dots, \lambda_n$ selected, to be sent to wavelength converters
6. Thereafter, actions are like the case of Fig. 3.

Even with the second embodiment, there can be
implemented a connection-less simplified structure for
structural integration of the two networks (transmission
20 paths).

Fig. 5 shows an optical repeater 21 according to a third
embodiment. In this optical repeater 21, an optical
amplifier 8 is provided after the wave combiner 7. This
optical amplifier 8 compensates the loss at the wavelength
25 converters 6, and also performs the optical amplification

wave combining.

Fig. 6 shows an optical repeater 31 according to a fourth embodiment. In this optical repeater 31, the optical amplifier 8 is provided between every wavelength converter 6 and the wave combiner 7. Accordingly, amplification can be effected an even level.

Because the optical amplifier 8 is inserted after every wavelength converter 6, the gain is adjustable in dependence on a wavelength conversion efficiency of associated wavelength, thereby permitting compensation of an optical loss.

The compensation may preferably be effected of both transmission path loss and wavelength conversion loss, as shown in the optical repeater 61 in Fig. 7.

Fig. 8 shows a wavelength converter 62 according to a fifth embodiment. This wavelength converter 62 may be used in place of the wave converters 6 in any of the first to fourth embodiments. The wavelength converter 62 comprises an opto-electrical converter 9 and an electro-optical converter 10. The opto-electrical converter 9 converts an input optical signal of wavelength λ_i into an electrical signal. The electro-optical converter 10, based on the control signal, converts the electrical signal into an optical signal of wavelength $\lambda_{i'}$.

The opto-electrical converter 9 may be a photo-diode,

avalanche photo-diode, photo-counter, etc. The electro-optical converter 10 can be constituted with ease by use of a semiconductor laser.

Fig. 9 shows a wavelength converter 63 according to a sixth embodiment. This wavelength converter 62 may be used in place of the wave converters 6 in any of the first to fourth embodiments. The wavelength converter 63 comprises a wavelength converting element 11 operative with a control signal to have a non-linear optical effect for converting an input optical signal λ_i into another wavelength λ_i' . The wavelength converting element 11 may be a semiconductor optical amplifier, electric field absorption type modulator, optical fiber, or the like.

Fig. 10 shows the wavelength converting element 111, that uses a semiconductor optical amplifier, according to a seventh embodiment. This wavelength converting element 111 may be used in place of the wavelength converting element 11 in the sixth embodiment.

Legend 12 denotes a light source, legend 13 denotes a photo-coupler, legend 14 denotes an optical filter, and legend 15 denotes the semiconductor optical amplifier. An optical signal (wavelength: λ_i) and pump light (wavelength: λ_p) are combined in the photo-coupler 13, to strike the semiconductor optical amplifier 15, which then generates a new wavelength-converted optical signal (wavelength: λ_i')

by way of a four-wave mixing. Only the wavelength-converted optical signal is filtered by the optical filter 14, to be output.

Fig. 11 shows a wavelength converting element 112, that
5 uses an electric field absorption type modulator, according to an eighth embodiment. This wavelength converting element 112 may be used in place of the wavelength converting element 11 in the sixth embodiment.

Legend 16 denotes the electric field absorption type
10 modulator. The other elements are same as those shown in Fig. 10, therefore, their explanation will be omitted. An optical signal (wavelength: λ_i) and non-modulated probe light (wavelength: $\lambda_{i'}$) from the light source 12 are combined in the photo-coupler 13, to strike the electric field
15 absorption type modulator 16, where the probe light (wavelength: $\lambda_{i'}$) is modulated by a mutual absorptive modulation effect of the modulator 16, and only the modulated probe light (wavelength: $\lambda_{i'}$) is filtered by the optical filter 14, to be output.

20 Fig. 12 shows a wavelength converting element 113, that uses an optical fiber, according to a ninth embodiment. This wavelength converting element 113 may be used in place of the wavelength converting element 11 in the sixth embodiment.

Legend 17 denotes the optical fiber. The other elements
25 are same as those shown in Fig. 10, therefore, their

explanation will be omitted. An optical signal (wavelength: λ_i) input to the wavelength converting element 11 is combined at the photo-coupler 13 with excited light (wavelength: λ_p) from the light source 12, to strike the optical fiber 17, which then generates a new wavelength-converted optical signal (wavelength: $\lambda_{i'}$) by way of a four-wave mixing. Only the wavelength-converted optical signal is filtered by the optical filter 14, to be output.

The following tenth to thirteenth embodiments are each addressed to a changing process in an optical repeater 1 (or optical repeaters 11, 21, 31, and 61), where wavelength intervals are changed from an even interval layout to an uneven interval layout, or from an uneven interval layout to an even interval layout.

The tenth embodiment corresponds to a case of changing the wavelength intervals in the optical repeater 1 from an even interval layout to an uneven interval layout.

Fig. 13A and Fig. 13B show examples of wavelength layout in the optical repeater 1. Fig. 13A is a graph of wavelength layout of an optical input signal in the optical repeater 1 provided with a wavelength converter. Relative to a zero-dispersion wavelength λ_0 of an optical fiber, n waves having wavelengths λ_1 to λ_n are laid out so that the SPM-GVD effect and FWM of their wavelengths are minimized.

Fig. 13B is a graph of wavelength layout of an optical

output signal in the optical repeater 1 provided with the wavelength converter. This signal is wavelength-converted so as to minimize the SPM-GVD effect and FWM relative to a zero-dispersion wavelength λ_0' of an optical fiber, to have
5 wavelengths laid out at uneven intervals, thus achieving like effects to the first embodiment.

The eleventh embodiment corresponds to a case of changing the wavelength intervals in the optical repeater 1 from an uneven interval layout to an even interval layout.

10 Fig. 14A and Fig. 14B show examples of wavelength layout in the optical repeater 1. Fig. 14A is a graph of wavelength layout of an optical input signal in the optical repeater 1 provided with a wavelength converter. Relative to a zero-dispersion wavelength λ_0 of an optical fiber, n waves
15 having wavelengths λ_1 to λ_n are laid out at uneven intervals so that the SPM-GVD effect and FWM of their wavelengths are minimized.

Fig. 14B is a graph of wavelength layout of an optical output signal in the optical repeater 1 provided with the
20 wavelength converter. This signal is wavelength-converted so as to minimize the SPM-GVD effect and FWM relative to a zero-dispersion wavelength λ_0' of an optical fiber, to have wavelengths laid out at even intervals, thus achieving like effects to the first embodiment.

25 The twelfth embodiment corresponds to a case of changing

the wavelength intervals in the optical repeater 1 from a constant value $\Delta \lambda$ to another constant value $\Delta \lambda'$.

Fig. 15A and Fig. 15B show examples of wavelength layout of the optical repeater 1. Fig. 15A is a graph of wavelength layout of an optical input signal in the optical repeater 1. Relative to a zero-dispersion wavelength λ_0 of the optical fiber 2, n waves having wavelengths λ_1 to λ_n are laid out at wavelength intervals of $\Delta \lambda$ so that the SPM-GVD effect and FWM of their wavelengths are minimized.

Fig. 15B is a graph of wavelength layout of an optical output signal in the optical repeater 1. This signal is wavelength-converted so as to minimize the SPM-GVD effect and FWM relative to a zero-dispersion wavelength λ_0' of the optical fiber 3, to have wavelengths laid out at changed intervals of $\Delta \lambda'$, thus achieving like effects to the first embodiment.

The thirteenth embodiment corresponds to a case of changing the number of wavelengths in the optical repeater 1 by a branching or insertion of wavelength.

Fig. 16A and Fig. 16B show examples of wavelength layout of the optical repeater 1. Fig. 16A is a graph of wavelength layout of an optical input signal in the optical repeater 1. Relative to a zero-dispersion wavelength λ_0 of the optical fiber 2, n waves having wavelengths λ_1 to λ_n are laid out so that the SPM-GVD effect and FWM of their wavelengths

are minimized.

Fig. 16B is a graph of wavelength layout of an optical output signal in the optical repeater 1. This signal is wavelength-converted to have wavelengths branched or
5 inserted to be laid out so as to minimize the SPM-GVD effect and FWM relative to a zero-dispersion wavelength λ_0 of the optical fiber 3, thus achieving like effects to the first embodiment.

Although the invention has been described with respect
10 to a specific embodiment for a complete and clear disclosure, the appended claims are not to be thus limited but are to be construed as embodying all modifications and alternative constructions that may occur to one skilled in the art which fairly fall within the basic teaching herein set forth.

15

WHAT IS CLAIMED IS:

1. An optical wavelength division multiplexing transmission system comprising:

a first optical fiber transmission path for a wavelength
5 division multiplex signal to be input therefrom;

a second optical fiber transmission path having a zero-dispersion wavelength different from the first optical fiber transmission path;

and an optical repeater which receives the wavelength
10 division multiplex signal from said first optical fiber transmission path, wavelength-converts the received signal with respect to respective wavelengths thereof, and outputs the wavelength-converted signal to said second optical fiber transmission path.

15 2. The optical wavelength division multiplexing transmission system according to claim 1, wherein said optical repeater is configured to shift, by a predetermined value, all wavelengths of the wavelength division multiplex signal.

20 3. The optical wavelength division multiplexing transmission system according to claim 1, wherein said optical repeater is configured for wavelength intervals of the wavelength division multiplex signal input from said first
25 optical fiber transmission path to be an even interval and

for wavelength intervals of the wavelength division multiplex signal output to said second optical fiber transmission path to be uneven intervals.

5 4. The optical wavelength division multiplexing transmission system according to claim 1, wherein said optical repeater is configured for wavelength intervals of the wavelength division multiplex signal input from said first optical fiber transmission path to be uneven intervals and
10 for wavelength intervals of the wavelength division multiplex signal output to said second optical fiber transmission path to be an even interval.

15 5. The optical wavelength division multiplexing transmission system according to claim 1, wherein said optical repeater is configured for wavelength intervals of the wavelength division multiplex signal input from said first optical fiber transmission path to be a constant value $\Delta\lambda$ and for wavelength intervals of the wavelength division
20 multiplex signal output to said second optical fiber transmission path to be a constant value $\Delta\lambda'$.

6. The optical wavelength division multiplexing transmission system according to claim 1, wherein said optical
25 repeater is configured for a number of wavelengths of the

wavelength division multiplex signal input from said first
optical fiber transmission path to be a natural number n and
for a number of wavelengths of the wavelength division
multiplex signal output to said second optical fiber
5 transmission path to be a natural number m ($m \neq n$).

7. The optical wavelength division multiplexing
transmission system according to claim 1, wherein said optical
repeater comprises a non-linear element that performs the
10 wavelength conversion.

8. The optical wavelength division multiplexing
transmission system according to claim 1, wherein said optical
repeater comprises one or more semiconductor optical
15 amplifiers.

9. The optical wavelength division multiplexing
transmission system according to claim 1, wherein said optical
repeater comprises one or more electric field absorption type
20 optical modulators and one or more light sources.

10. The optical wavelength division multiplexing
transmission system according to claim 1, wherein said optical
repeater comprises one or more light sources and an optical
25 fiber having a non-linear optical effect.

ABSTRACT OF THE DISCLOSURE

An optical repeater is provided between a first optical fiber transmission path and a second optical fiber transmission path having a zero-dispersion wavelength
5 different from the first optical fiber transmission path. This optical repeater wave-converts a wavelength division multiplex signal input from the first optical fiber transmission path with respect to respective wavelengths thereof, and outputs the wave-converted signal to the second
10 optical fiber transmission path.

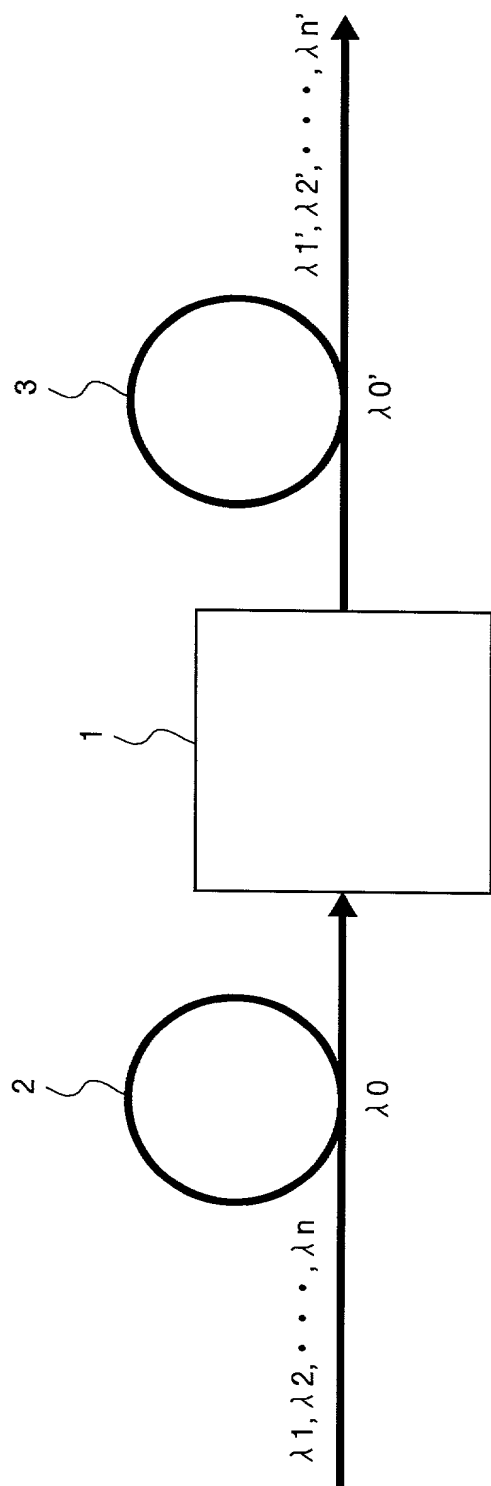


FIG.2A

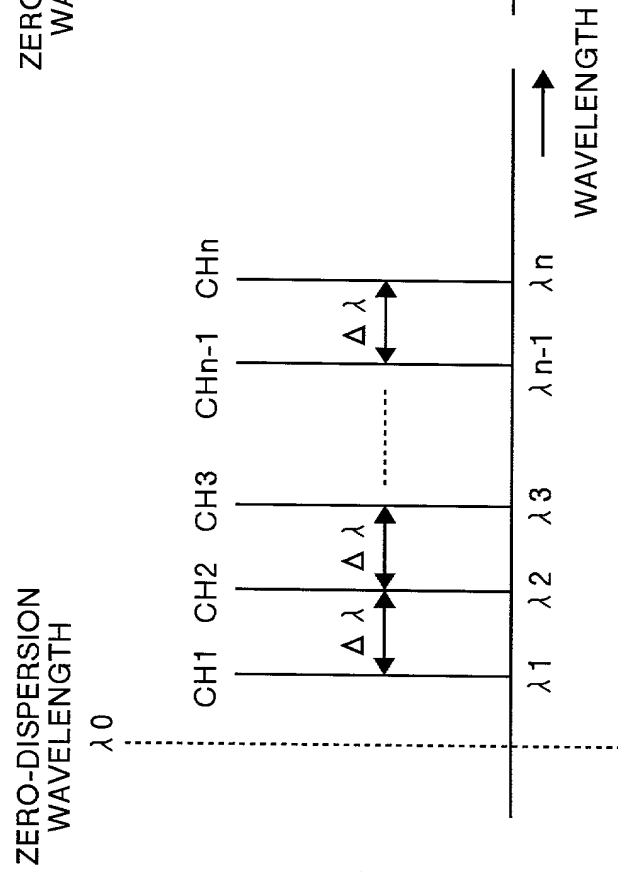


FIG.2B

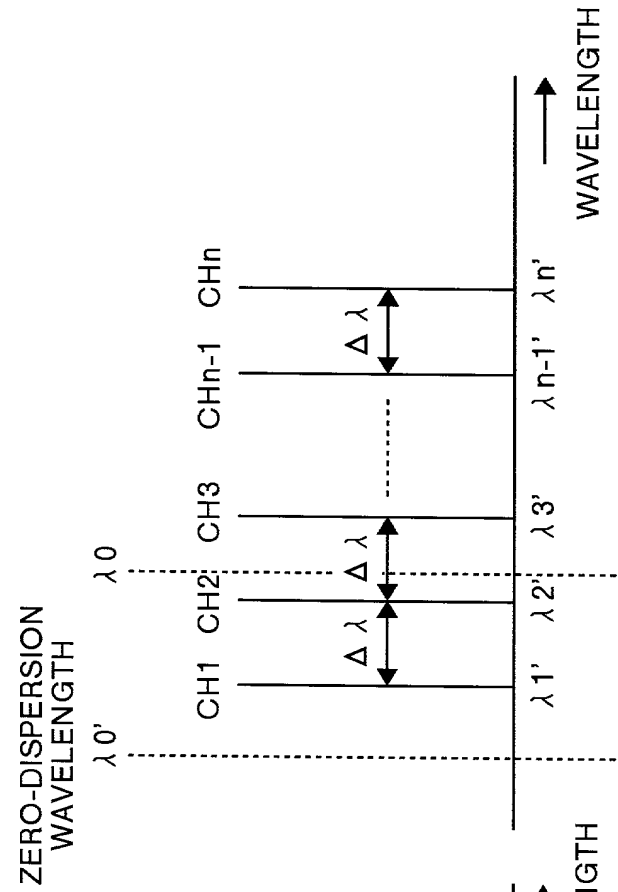


FIG.3

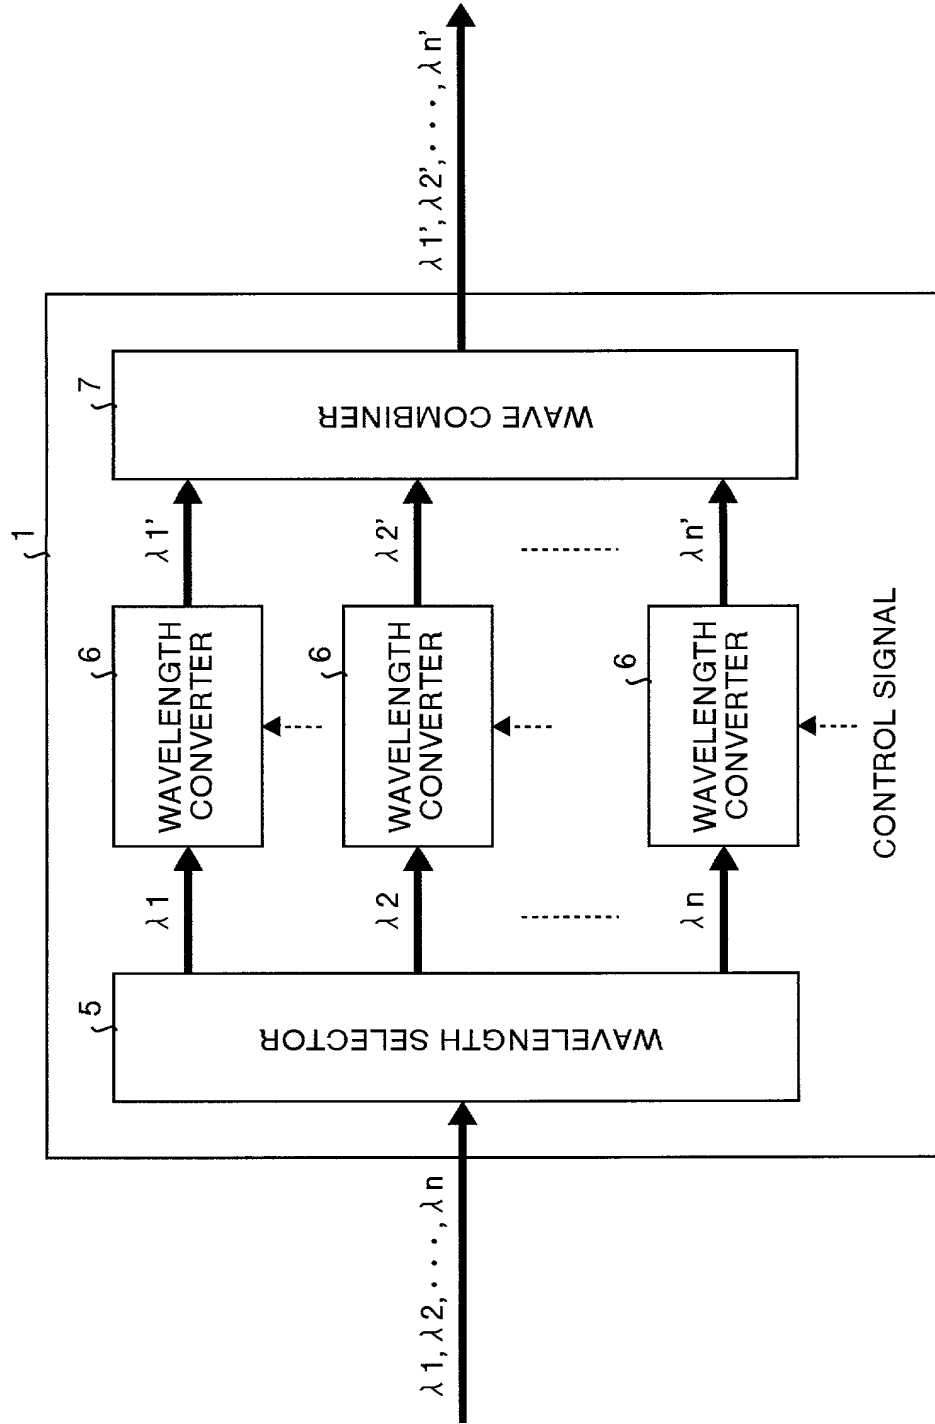


FIG.4

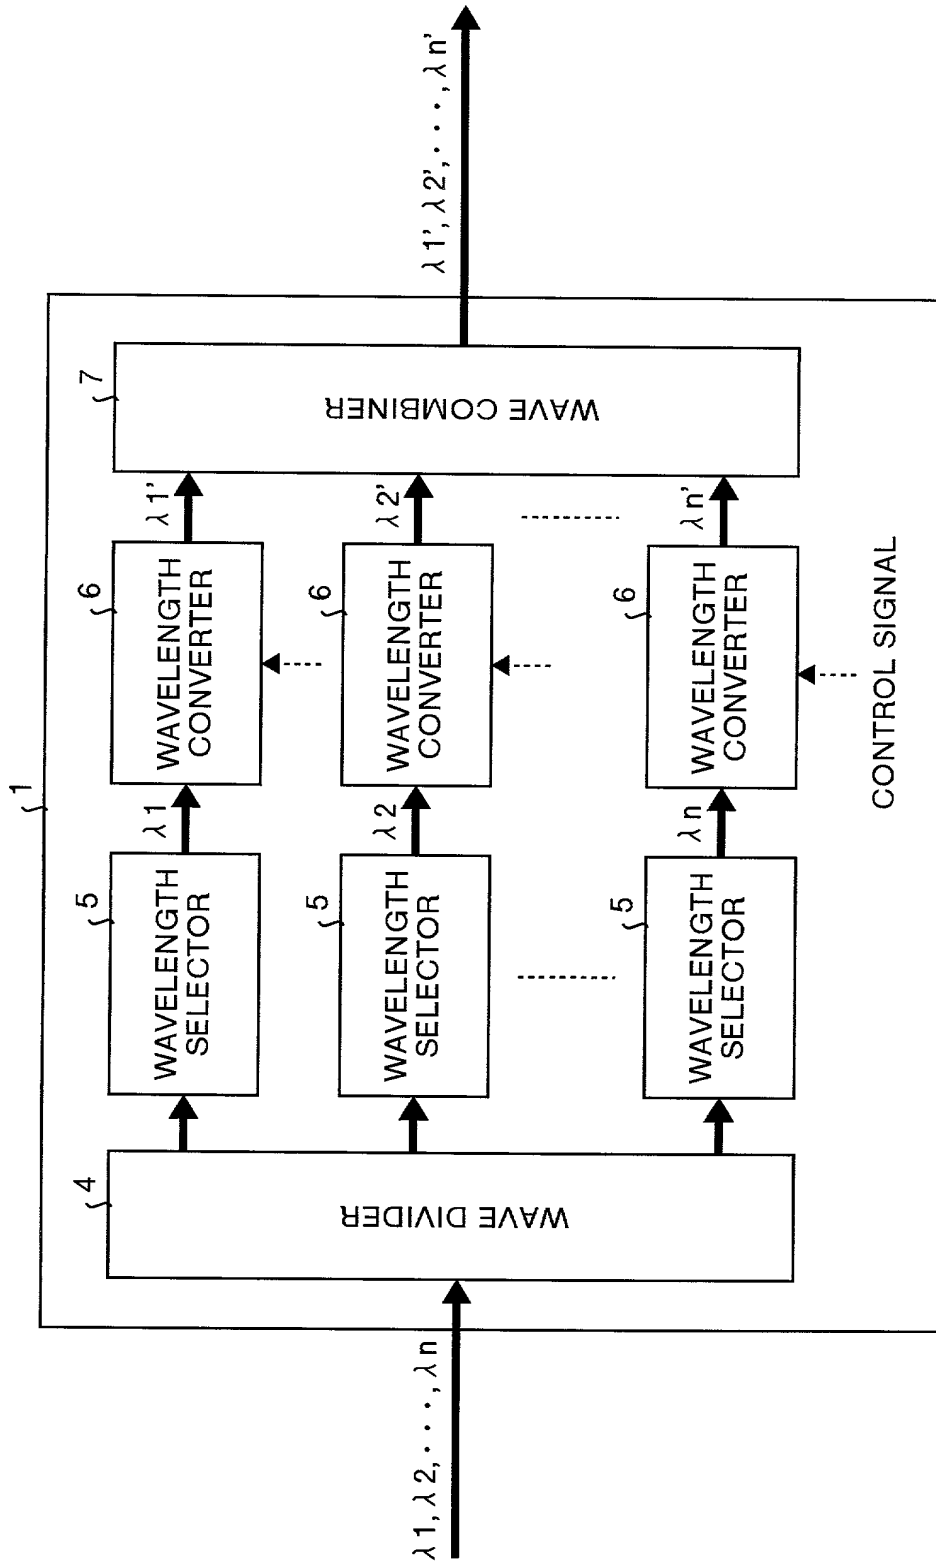


FIG.5

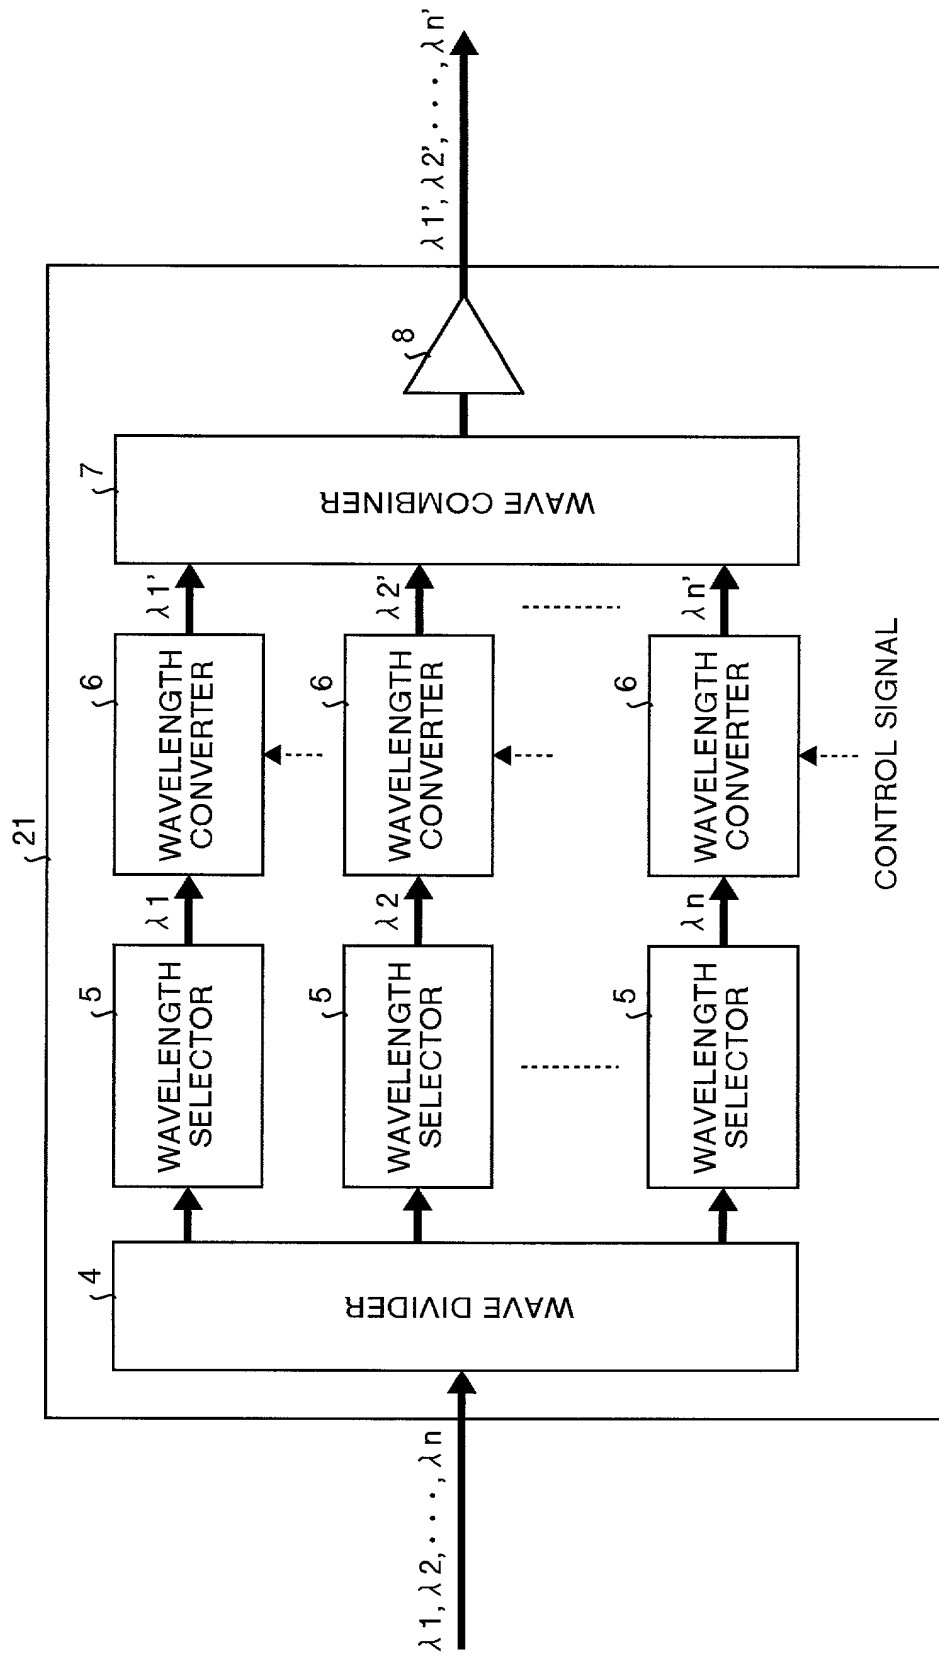


FIG.6

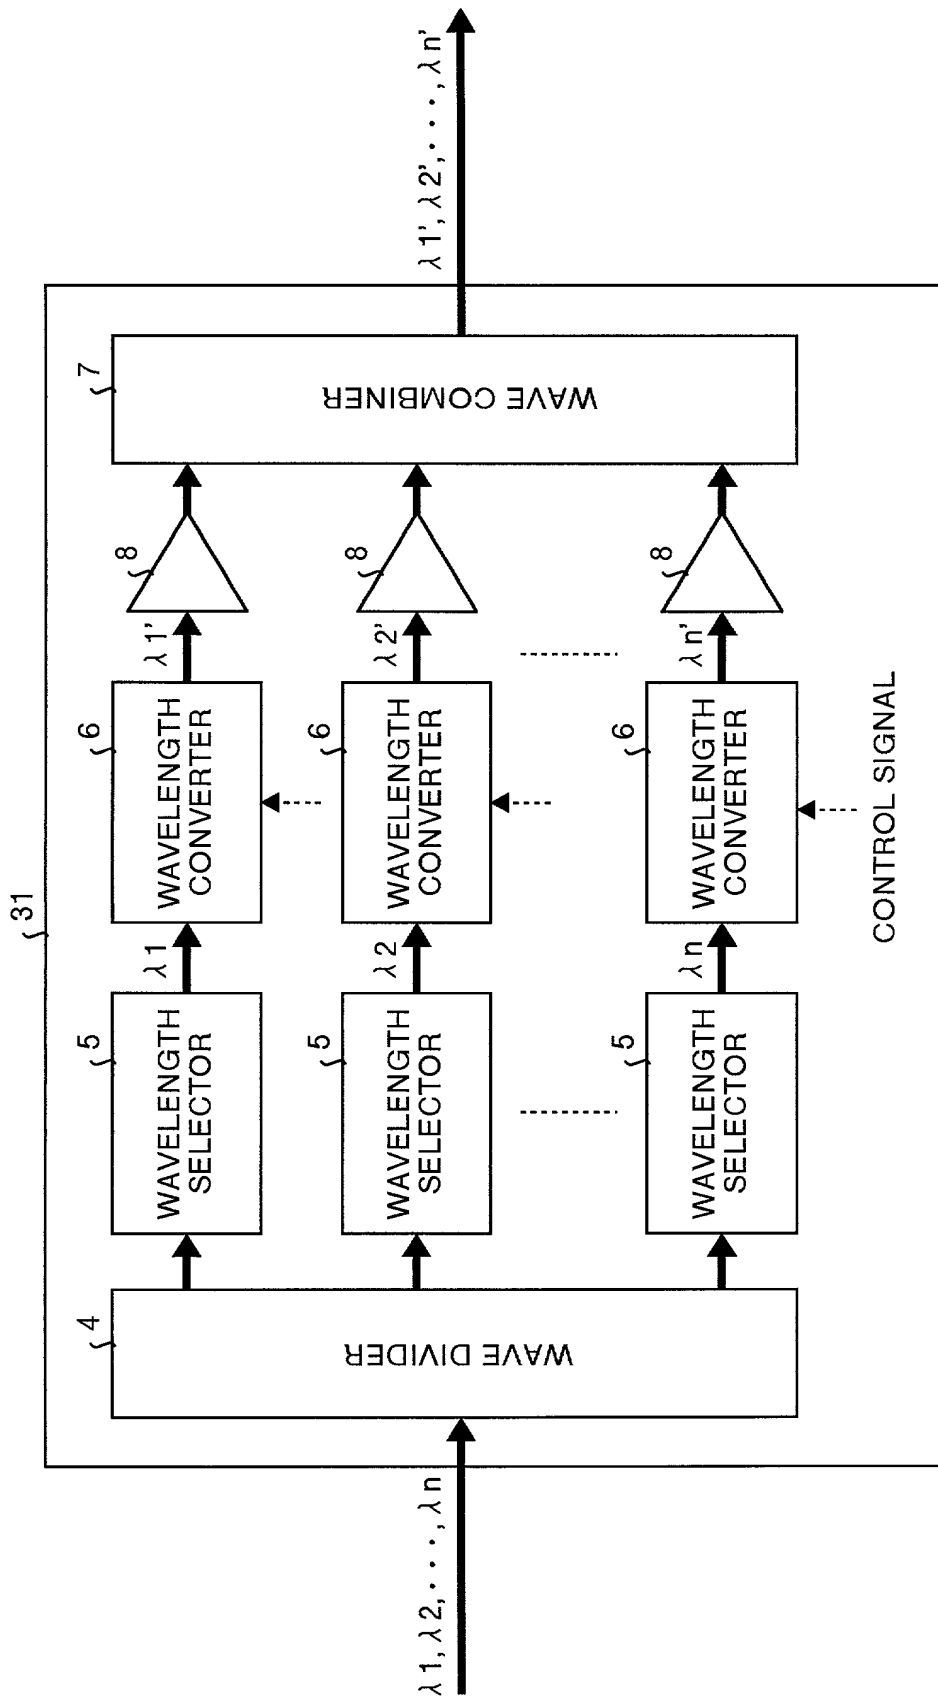


FIG. 7

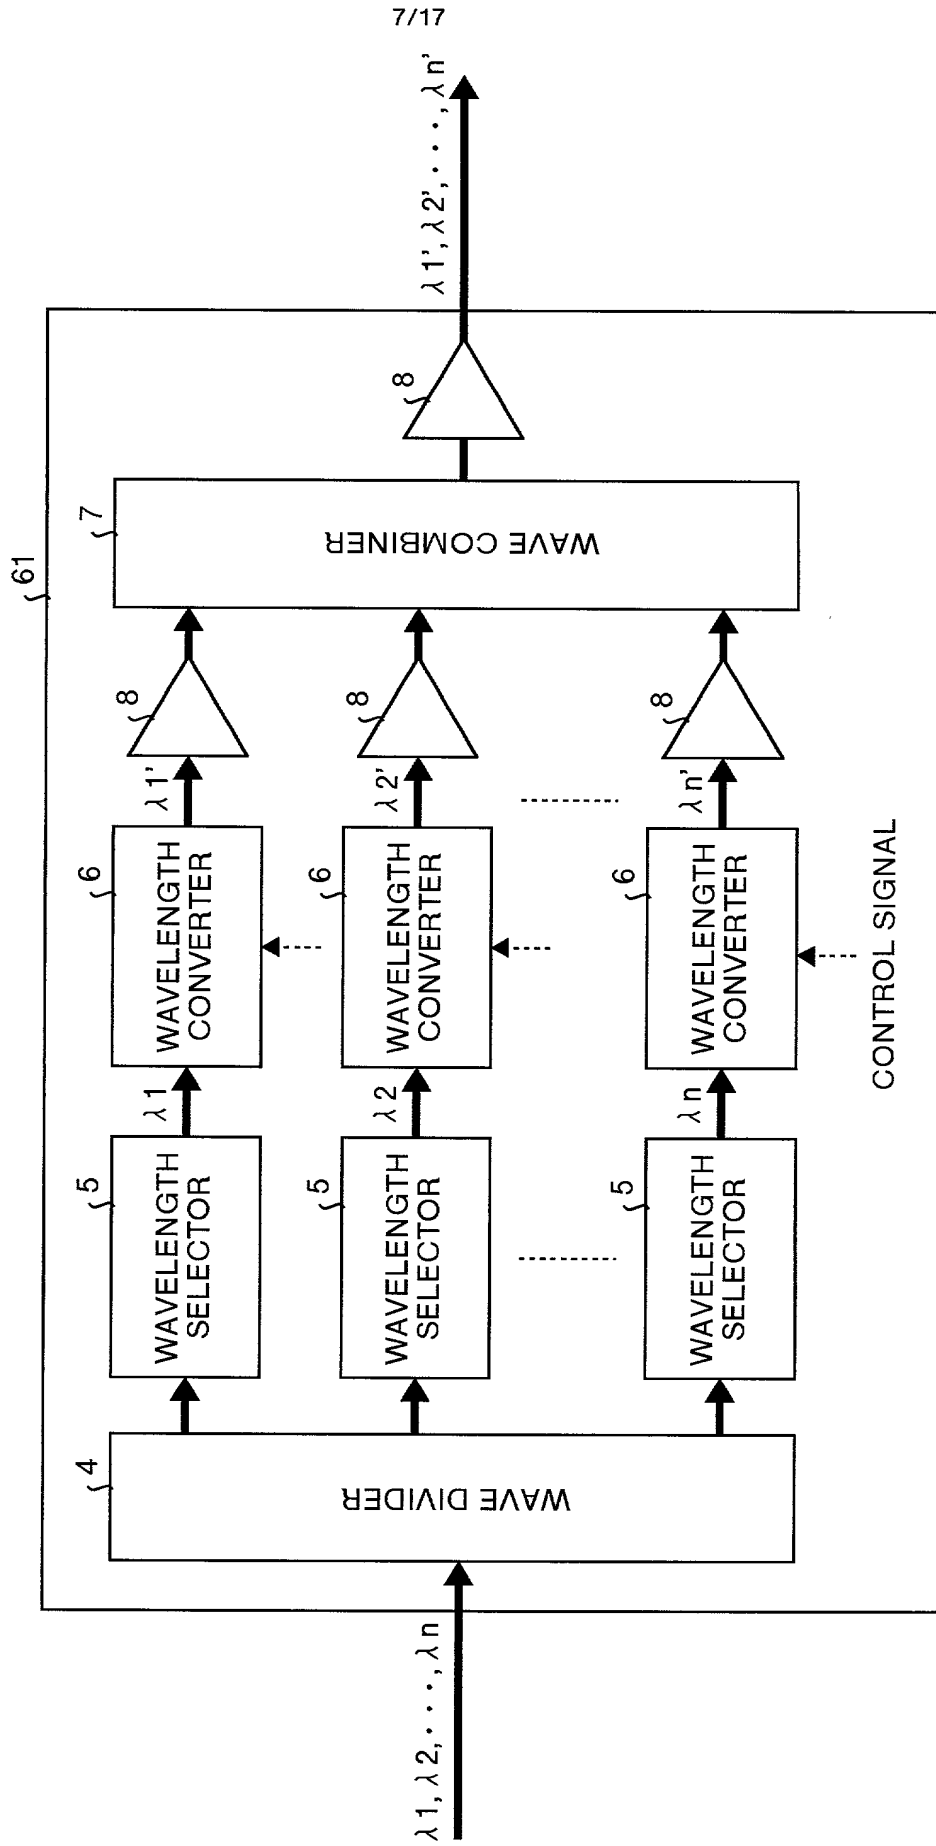


FIG.8

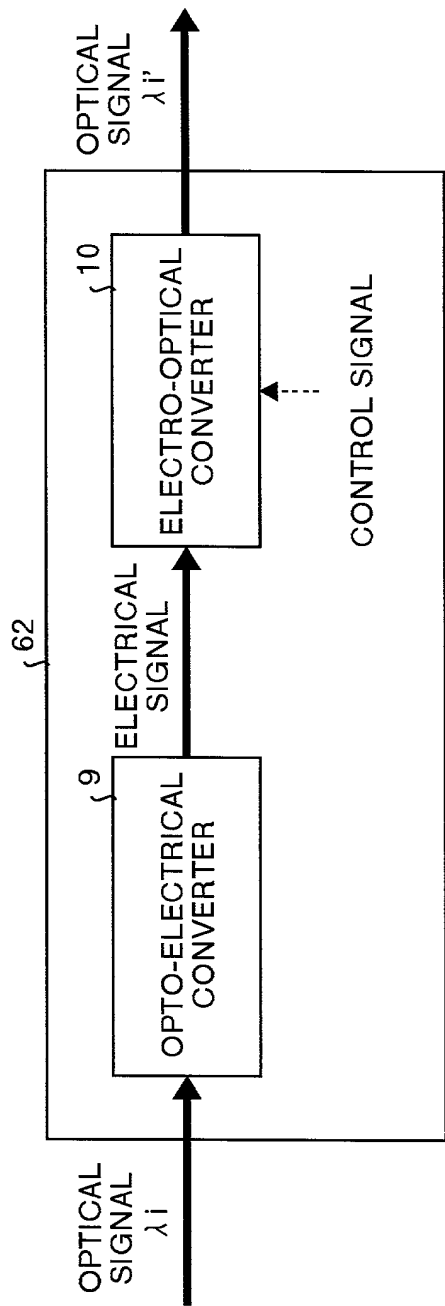


FIG.9

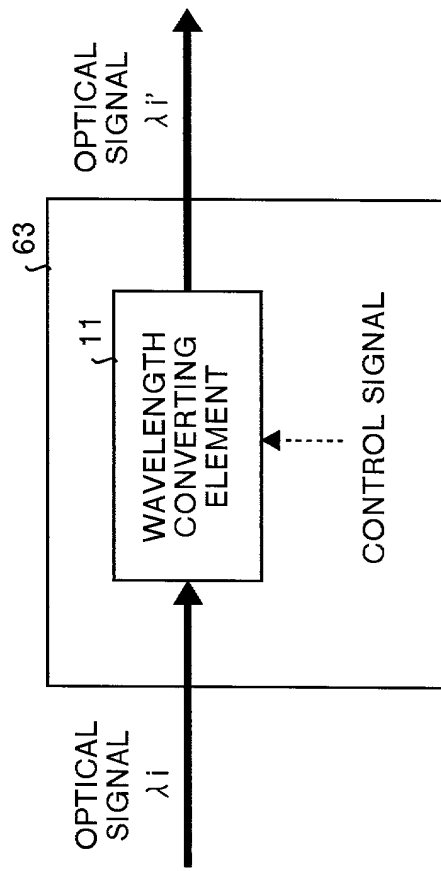


FIG.10

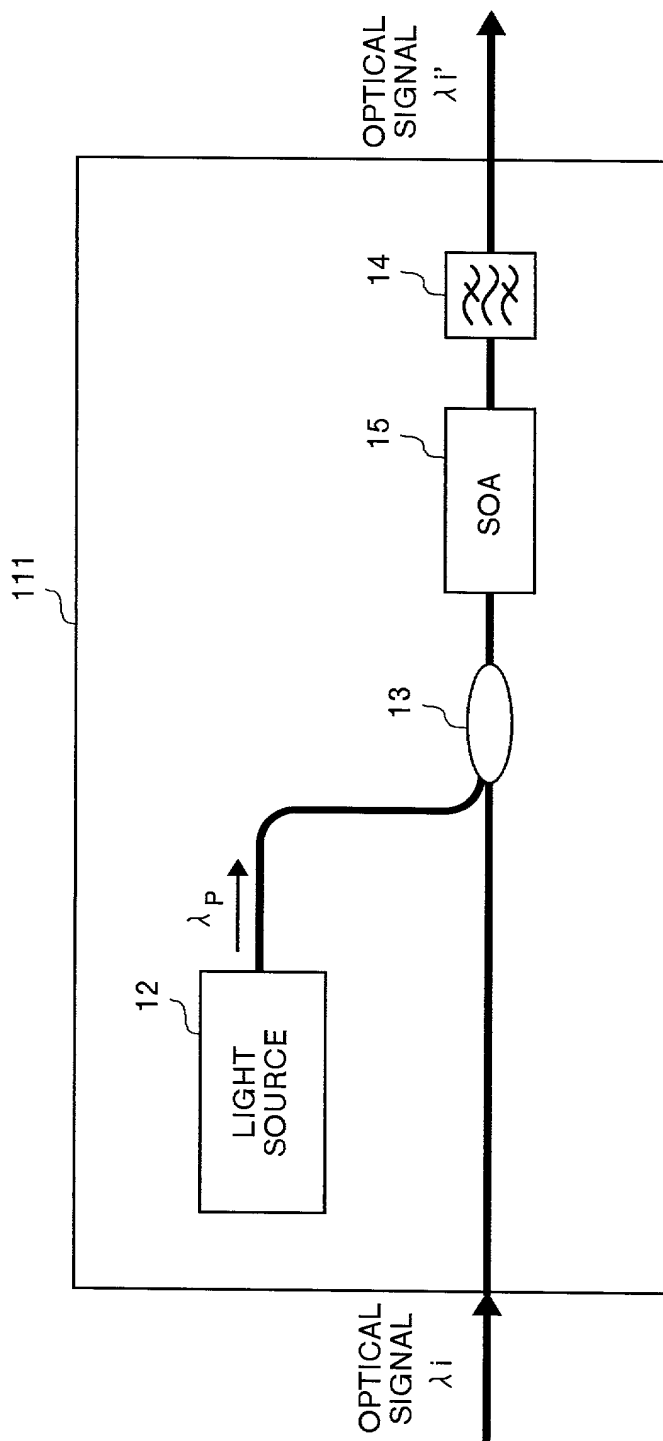


FIG.11

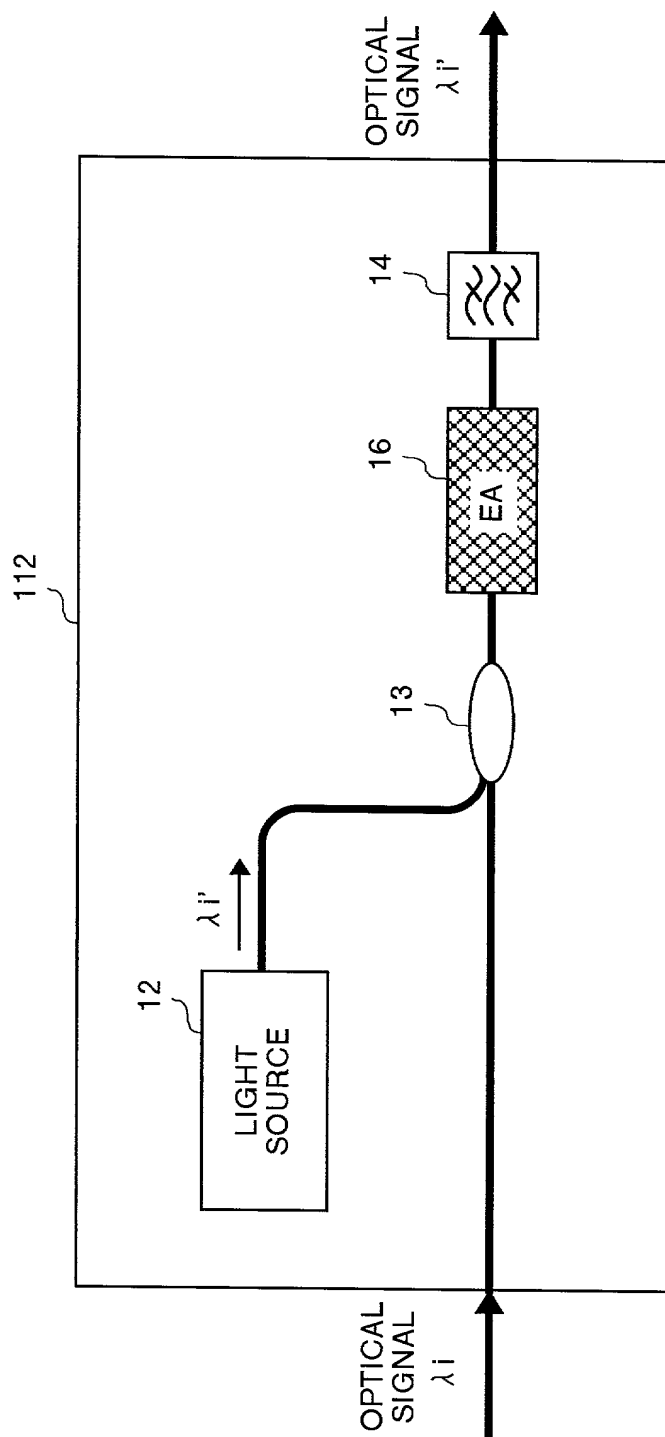


FIG.12

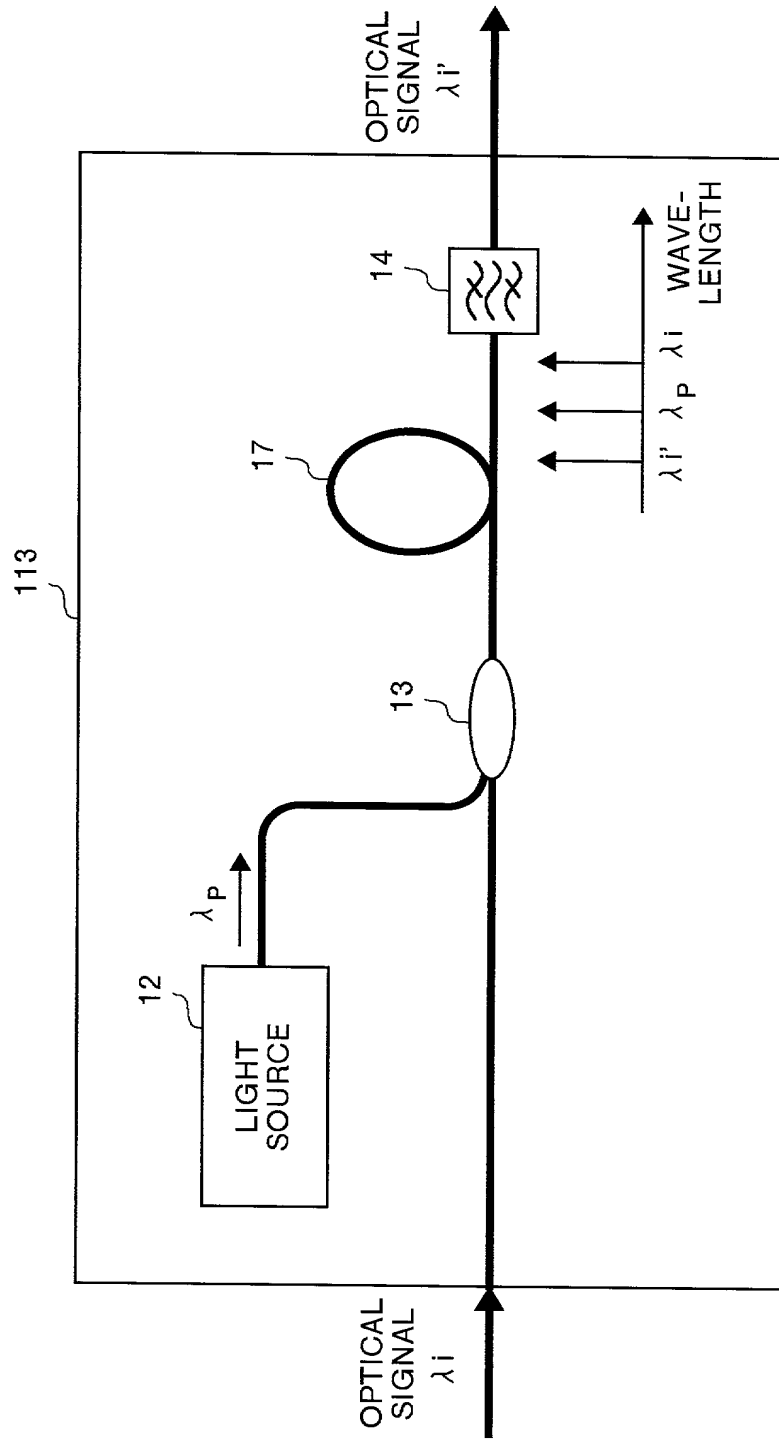


FIG. 13A

FIG.13A

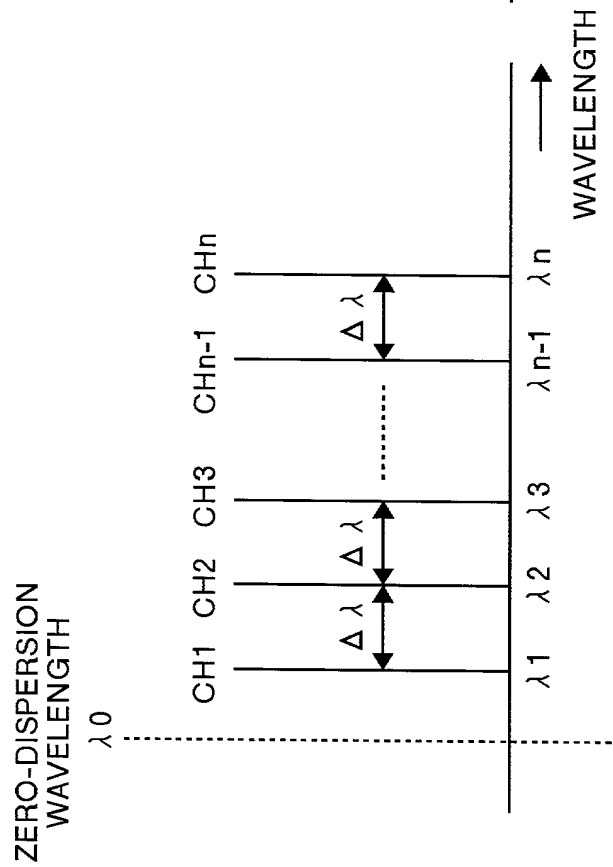


FIG.13B


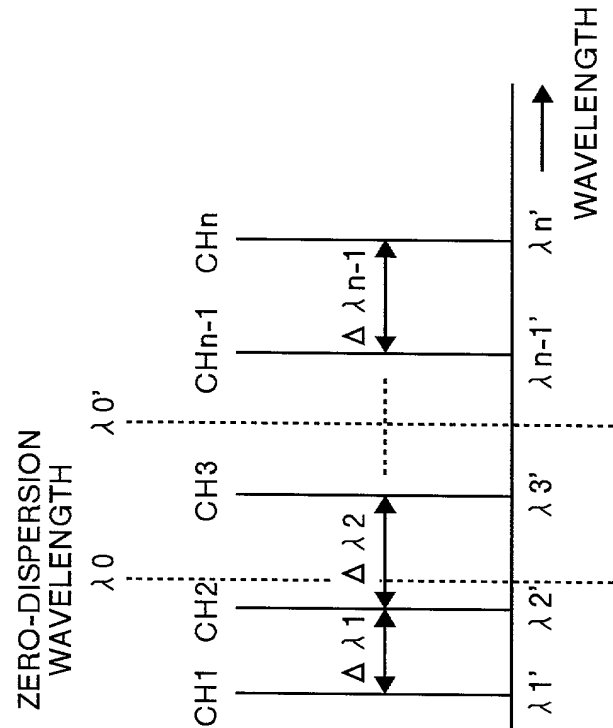


FIG.14A

ZERO-DISPERSION
WAVELENGTH

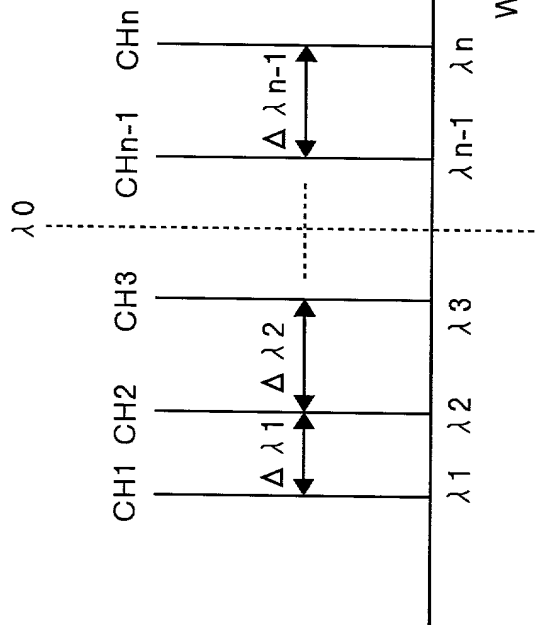

ZERO-DISPERSION
WAVELENGTH

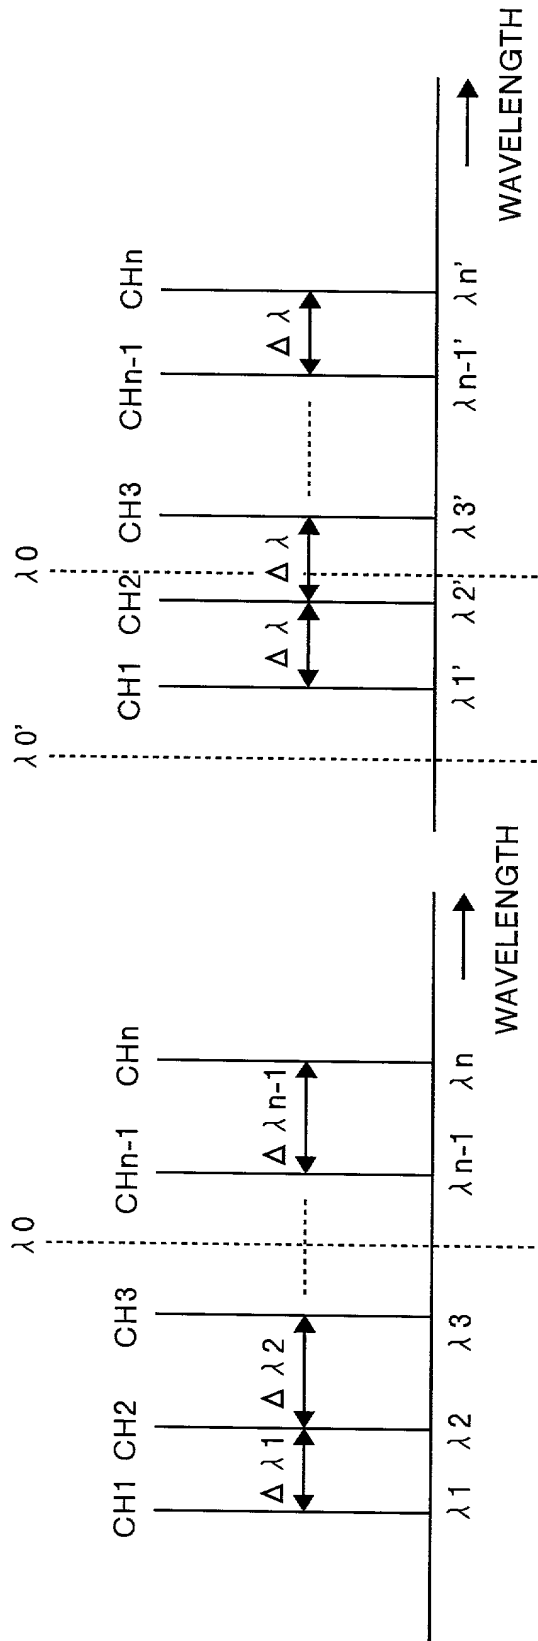


FIG.15A

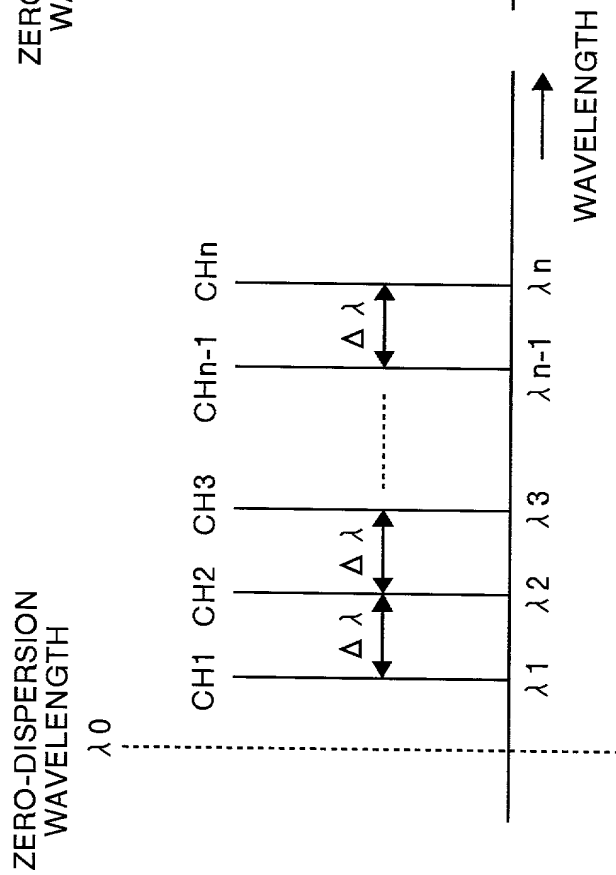


FIG.15B

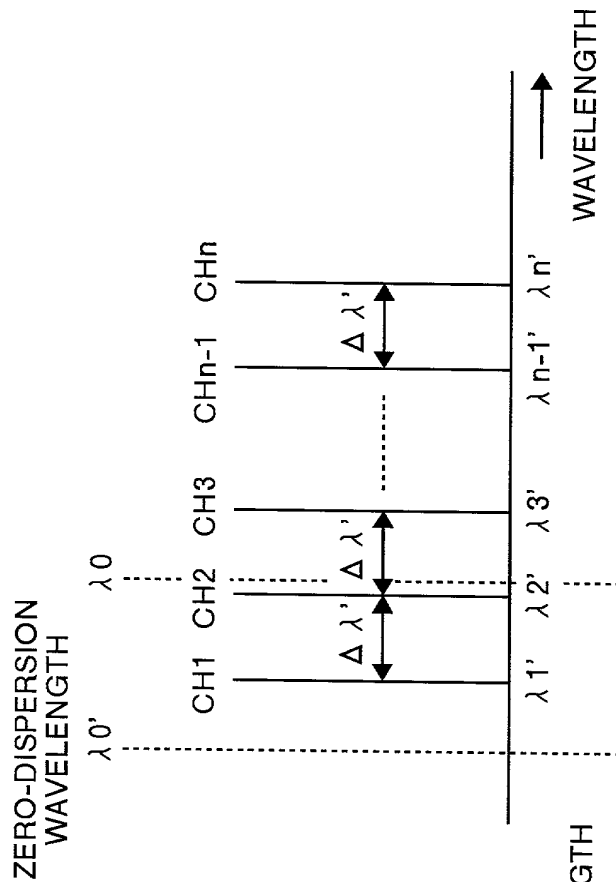


FIG.16A

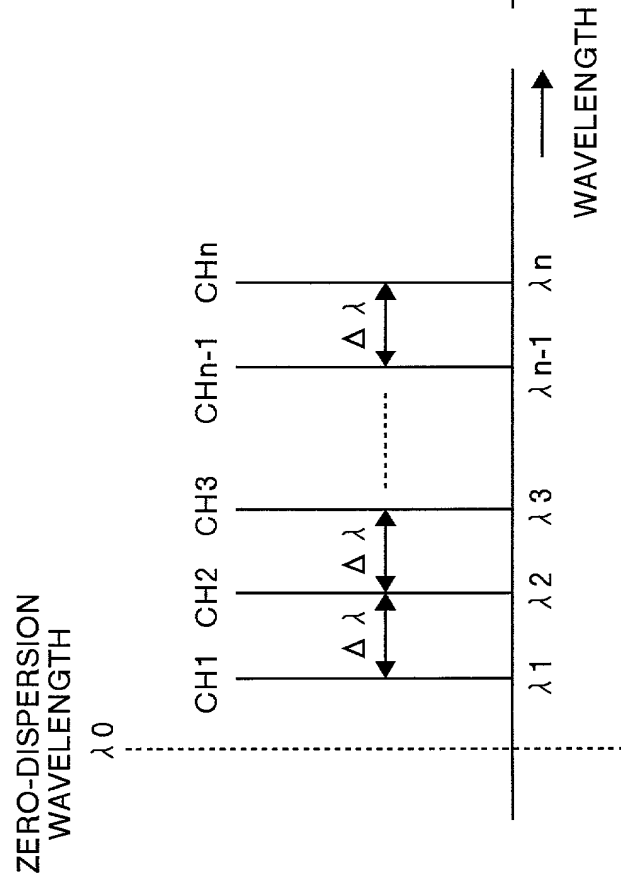


FIG.16B

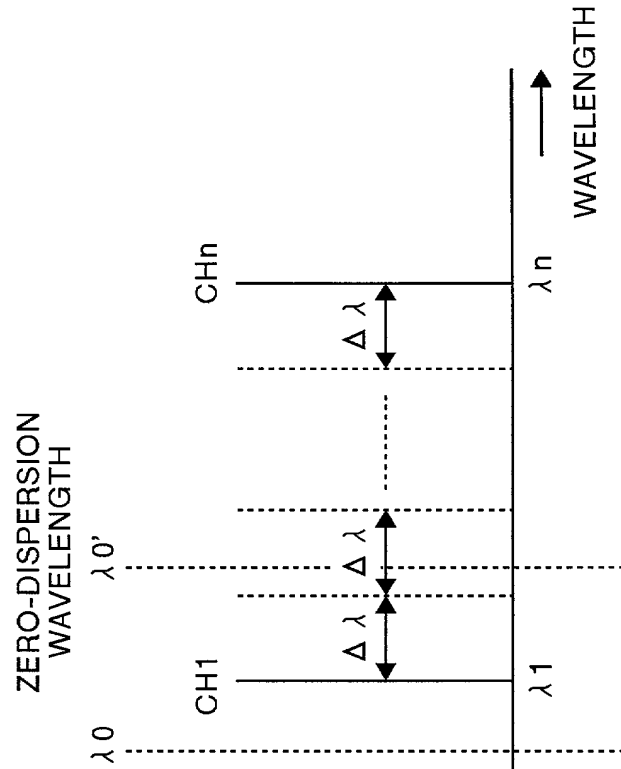


FIG.17

